




CITAL QUARTZ

GRANA FINE

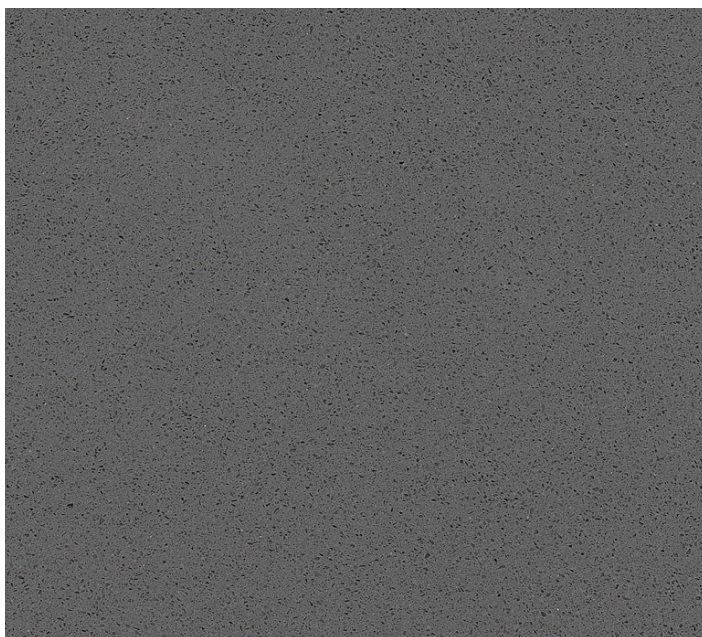

SLATE GREY

FEATURES

FINISHES Polished

THICKNESS 3/8" (1cm), 1/2" (1.2cm), 3/4" (2cm), 1 1/4" (3cm)

SLAB SIZE 118x55in (300x140cm)

FLOORING SIZES

24x24in, 16x24in, 12x24in, 16x12in, 12x12in
60x60cm, 40x60cm, 30x60cm, 40x30cm, 30x30cm



EDGE DETAIL



Basic eased Straight bevel Bullnose

TECHNICAL INFORMATION

| | | |
|--------------------------------|-----------------------------|--|
| Absorption by weight | ASTM C97/C97M-09 | 0.06 % |
| Density | | 2370 kg/m ³ |
| Abrasion resistance (polished) | ASTM C241/C241M-13 | 47 |
| Flexural strength | ASTM C880/C880M-09 | Dry condition: 34.9 MPa Wet condition: 37.5 MPa |
| Compressive strength | Refer to ASTM C170/C170M-14 | Dry condition: 192 MPa Wet condition: 185 MPa |
| Breaking strength | ASTM C 648-09 | 5100 N |
| Thermal expansion | ASTM C531-00(2012) | 30.9×10 ⁻⁶ /°C |
| Chemical resistance | ASTM C650-04(2009) | Not affected |
| Abrasion wear index | ASTM C501-84(2009) | Wear index: 136 |

